

Qwik-Switch Keyfob (3 Scene, 1 Off) Installation

1 Connect the receiver to the lights

2 Hold the LINK button until the LED starts flashing

3 Then press a button on the keyfob within 25 sec

A Receiver can link up to 30 different buttons.
 To unlink a button: Repeat steps 2&3.
 To clear all links in a Receiver:
 Hold the Receiver Link Button until the LED is ON solid (10 sec) then release.

Scene Saving:


1 Link the OFF button to each light, one at a time. This will switch off all selected lights.

2 Link the scene button to all the lights in the scene. Link one light at a time.

3 Set the light levels for the Scene, using a standard transmitter, or the test button on the side of the receiver.

4 Hold the Scene button for 15 seconds to save...Done

TRANSMITTER:




Button Operation:
 Press = ACTIVATE SCENE/OFF

LED Indicator on button press:
 1 Flash = Normal operation
 2 Flashes = Battery Low

BATTERY REPLACEMENT

Pull Battery out from the top Insert new Battery from the side

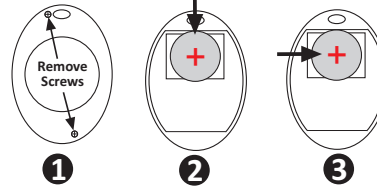

After replacing the battery, the LED will flash 3 times to indicate successful power-up.

www.qwikswitch.co.za

Qwik-Switch Keyfob (3 Scene, 1 Off) Installation

1 Connect the receiver to the lights

2 Hold the LINK button until the LED starts flashing

3 Then press a button on the keyfob within 25 sec

A Receiver can link up to 30 different buttons.
 To unlink a button: Repeat steps 2&3.
 To clear all links in a Receiver:
 Hold the Receiver Link Button until the LED is ON solid (10 sec) then release.

Scene Saving:


1 Link the OFF button to each light, one at a time. This will switch off all selected lights.

2 Link the scene button to all the lights in the scene. Link one light at a time.

3 Set the light levels for the Scene, using a standard transmitter, or the test button on the side of the receiver.

4 Hold the Scene button for 15 seconds to save...Done

TRANSMITTER:




Button Operation:
 Press = ACTIVATE SCENE/OFF

LED Indicator on button press:
 1 Flash = Normal operation
 2 Flashes = Battery Low

BATTERY REPLACEMENT

Pull Battery out from the top Insert new Battery from the side

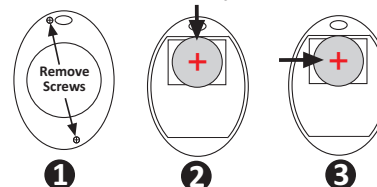

After replacing the battery, the LED will flash 3 times to indicate successful power-up.

www.qwikswitch.co.za